

BOBCAT CONDITIONS EXCLANATIONS TO BOTH TO BO

THE BOBCAT LINE OF COMPACT EXCAVATORS IS
A PERFECT EXAMPLE OF OUR APPROACH TO EQUIPMENT
DESIGN: NEVER STOP MAKING IT BETTER.

Bobcat® excavators deliver stronger performance in a lighter machine, taking the production of owners and operators to the next level. Smooth, refined hydraulics allow you to dig your way out of extremely tough jobs.

YOUR COMPACT EQUIPMENT EXPERTS

Bobcat built its brand on quality equipment serviced by reliable local dealers who provide authorized service, warranty repairs and an exceptional inventory of in-stock parts. With the help of your knowledgeable dealer, you can keep your machine running strong, job after job, in the toughest working conditions.





YOUR JOB HAS FIND YOUR IDEAL MACHINE OUR EXTENSIVE COMPACT EXCAVATOR LINEUP.

FIND YOUR IDEAL MACHINE IN

With machines ranging in size classes from 1-10 ton, the Bobcat compact excavator lineup enables you to match specs, features and Bobcat exclusives to the work that you do the most.

R-Series machines provide you with the industry's hardest-working, most versatile digging machine, with rugged durability. fast-digging performance and impressive innovation; the R2-Series lineup represents the latest generation of Bobcat excavators, with all of the advancements introduced in R-Series machines, plus a variety of additional enhancements.



10.2 hp (7.6 kW) | Standard Arm 6 ft. (1820 mm) Dig Depth





13.9 hp (10.4 kW) | Standard Arm 8 ft. 5 in. (2565 mm) Dig Depth





24.8 hp (18.5 kW) Long Arm 9 ft. 6 in. (2906 mm) Dig Depth





24.8 hp (18.5 kW) Standard, Long or Extendable Arm 10 ft. 2 in. (3099 mm) - 12 ft. 9 in. (3886 mm) Dig Depth





ESE PORTO

42.6 hp (31.7 kW)
Standard, Long or Extendable Arm
10 ft. 4 in. (3163 mm) – 12 ft. 4 in. (3769 mm)
Dig Depth





EEO R2-SERIES

55.7 hp (41.5 kW) Long or Extendable Arm 13 ft. 1 in. (3992 mm) – 14 ft. 9 in. (4497 mm) Dig Depth



E88

65.4 hp (48.7 kW) | Long Arm 15 ft. 2 in. (4622 mm) Dig Depth

R2-SERIES COMPACT EXCAVATORS: YOUR NEXT REVOLUTION

Jobs, customer demands and working conditions get tougher, and operators need a machine to match. That's why Bobcat introduced R2-Series compact excavators. This new generation of excavator begins with the same revolutionary benefits introduced in R-Series excavators, and it adds a variety of impressive enhancements to performance, uptime, comfort, serviceability and versatility.

MORE INNOVATION TO REVOLUTIONIZE YOUR WORK

Read about the latest R2-Series upgrades here, and then see these impressive machines at your Bobcat dealer.

EXEMPLARY MACHINE BALANCE

in the R2-Series excavators provides improved lift capacity and increased operator confidence that improve your productivity.

REDESIGNED BOBCAT ENGINE

provides improved performance, quieter operation, enhanced cold-weather operation and simplified routine maintenance.

IMPROVED CONTROL

due to a new hydraulic control valve coupled with new low-effort joysticks – this ensures a quick, smooth and precise work group.

EXTENDED SERVICE INTERVALS

for engine oil service, plus easier-to-change fuel filters.

ADVANCED DISPLAY OPTIONS

include an easy-to-read standard 5-inch digital display, providing enhanced machine monitoring and interaction. An optional touch display provides even more features, including Bluetooth® connectivity.

CONVENIENT VERSATILITY

including easy-to-reach arm-mounted auxiliary hydraulics and optional clamp diverter valve for improved ability to run other attachments – without disconnecting the clamp.











predictability and control.

8

MORE PREDICTABLE

The Bobcat-exclusive control valves provide a predictable work group that helps you confidently make precise movements in tight-fitting areas.

SMOOTHER

Many brands claim they are smooth when they are really just slow. The Bobcat-exclusive control valve systems enable smooth, fast hydraulic performance with leading cycle times. Cushioned cylinders further enhance your precision and control.





MORE POWERFUL

High-efficiency, torque-limiting piston pumps match force to demand, continuously responding to loads and delivering exceptional arm and bucket forces.

FASTER

When you measure cycle times on the job, under load — filling trucks, placing boulders or trenching — you'll find that Bobcat beats the competition. By matching cylinder size to pump capacities, Bobcat excavators achieve industry-leading cycle times.

FINGERTIP BOOM SWING CONTROL

Effective excavator work is all about precision and quickness. Bobcat excavator controls provide the ability to make fine movements with low effort and maximum comfort – so you can get better results in less time, with less fatigue.

MULTI-FUNCTION METERING

A rocker-style thumb switch, located on the left joystick, provides superior boom swing control with better metering than you can achieve with foot pedals. Simultaneous actions, such as swinging while traveling, are simple and natural. A thumb toggle enables you to switch between second auxiliary hydraulics and boom offset without removing your hand from the left joystick. It provides more convenient, more intuitive control over your machine.

MORE CONTROLS AT YOUR FINGERTIPS

Left-Hand Joystick

When your excavator is equipped with secondary auxiliary hydraulics, the left-hand joystick includes a button for easy activation.


Right-Hand Joystick

Operators can control the rearview camera and re-bench the depth check system. (Available with machines equipped with 5" and 7" displays.)






LIGHTER MACHINES. MAXIMUM POWER.



Bobcat excavators have more engine horsepower than other brands of the same size, which means pound for pound, you'll get better digging performance than you would from other manufacturers' machines.



HYDRAULIC PRESSURE

HYDRAULIC HORSEPOWER MEANS FASTER CYCLE TIMES.

More engine horsepower enables Bobcat excavators to generate more power in the hydraulic system for faster cycle times under load. Simply put, they dig stronger and faster.









0000 #



INTEGRATED WITH MULTIPLE BOBCAT DISPLAYS AND PANELS

There are no display screens or control panels to install. The deluxe instrument panel as well as the new 5-inch and 7-inch displays give you complete control and job monitoring.

MONITOR PROGRESS ON YOUR DISPLAY PANEL:

- Distance to target
- · Grade check
- · Depth check

FULLY WIRED FOR SIMPLICITY AND ACCURACY

The simple, durable depth check system from Bobcat is wired, so job conditions or wireless signal loss will never rob your accuracy.

- Reduces the lag time of the signal transmission from the sensor to instrument panel display
- Maintains a strong signal even when submerged in water
- No batteries to charge and maintain



BREAKOUT PERFORMANCE THAT'S CUSTOMIZED TO YOU



Bobcat compact excavators provide you with the choice of three different lift arm configurations. This allows you to customize the excavator's breakout forces and reach to the work you do most often. Choose a standard arm, long arm or extendable arm.

STANDARD ARM

The standard arm gives you maximum breakout force and lifting ability.


LONG ARM

If you need more reach and dig depth to avoid machine repositioning or to make loading trucks faster and easier, equip your machine with the optional long arm (available on certain models).

EXTENDABLE ARM

The extendable arm option gives you the best of both worlds. Get power and lifting performance when it's retracted. Telescope the arm to extend the machine's dig depth and reach without repositioning. It's the only extendable arm that's clamp-compatible in the industry.



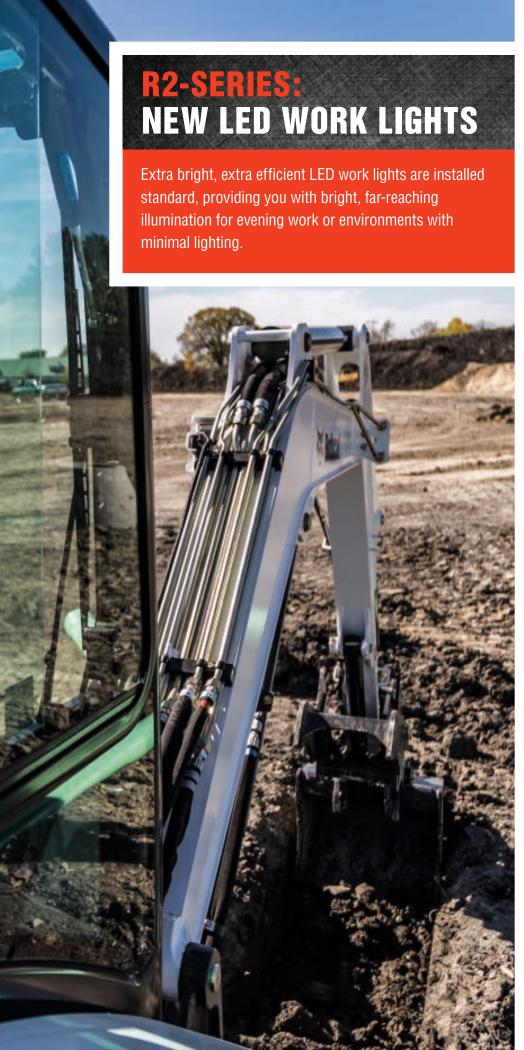



IN-TRACK SWING FRAME

All Bobcat compact excavators feature the exclusive in-track swing frame, which allows you to get closer to your work. Our swing castings and cylinders stay within the tracks when offset digging — giving you the ability to truly dig flush up against an obstacle and see the work in tight areas.




- More downward positioning ability adds stability.
- Blade float simplifies grading, leveling and backfilling.
- Blade is reversible for extended life.



R2-SERIES: STRONGER BLADE The top edge of the standard blade has a more durable design that is more robust against impact.

AUTO SHIFT TRAVEL

Auto shift travel responds to your needs as you travel, shifting the machine out of high range and back automatically. It offers superb travel performance without having to shift manually. Available on most models.

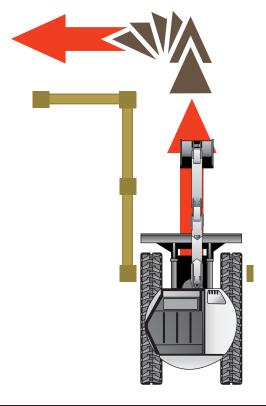






AUTO IDLE

When you stop the work, Bobcat excavators anticipate your need for a quieter environment. Auto idle engages automatically when machine functions are not used for four seconds. This saves fuel and lowers the noise considerably, improving jobsite communications. Move the controls or initiate travel, and the excavator automatically returns to the previously set throttle position.







CHOOSING YOUR TAIL SWING

CONVENTIONAL TAIL SWING: MAXIMUM DIGGING POWER AND NARROW WIDTH

A zero tail swing (ZTS) or minimal tail swing excavator is generally a little wider than a conventional swing excavator. Consider conventional if your biggest obstacle is gaining access through a gate or maneuvering into a crowded backyard.

ZERO AND MINIMAL TAIL SWING: LESS RESTRICTED ROTATION IN TIGHTER AREAS

A ZTS or minimal tail swing excavator gives greater flexibility if you are constantly working close to objects or against a wall.



VERSATILITY

Dozers can do only one thing. Backhoes offer just a few attachments. The compact track loader and excavator can use up to 60 different attachments, giving you access to more jobs.

COMPACT EFFICIENCY

The compact size of Bobcat loaders and Bobcat excavators allows use in confined areas like backyards and inside buildings.

EFFICIENCY SAVES YOU MONEY.

You can only accomplish one thing at a time with a backhoe. When you combine a Bobcat compact excavator with a loader, you can double your productivity. One can dig while another can backfill or load trucks at the same time.





REVOLUTIONARY COMFORT

Bobcat pays as much attention to operator comfort as it does to digging performance. Bobcat believes that there is a direct relationship between operator comfort and productivity. How does Bobcat provide superior comfort levels compared to other machines? We start by giving you the most cab space in the industry. In general, we provide 20% more interior cab volume than other brands. The suspension seat is wider. The cab interior is, too. Even when the job is tough and punishing, you'll enjoy a roomy, comfortable environment all day long.

THE BOBCAT CAB OFFERS AN UNBEATABLE OPERATOR EXPERIENCE.

When you take the seat, you can feel the difference, and you can see refinements everywhere you look.

More Floor Space

Experience optimal footroom and legroom.

Fold-Away Foot Pedals

These maximize floor space even more. Available on most models.

Premium Joysticks

You can even feel the quality at your fingertips, as the joysticks are newly designed to feel better in your hands.

A More Comfortable Ride

Bobcat compact excavators bring noticeably improved ride quality to the job, ensuring greater comfort while moving across bumpy jobsites.









OPTIONAL HEAT AND AIR CONDITIONING

Improved optional automatic heat and air conditioning provides a steady and comfortable temperature while you're inside the cab.

TUBULAR-FRAME REINFORCED DOOR

A tubular-frame reinforced door adds rigidity and closes tightly for an improved seal. It holds strong to keep dust and dirt out of the cab, even after years of use.

BEHIND-THE-SEAT STORAGE

Additional storage behind the seat provides a convenient space for work gloves and other personal items.

EASY-TO-REACH CONTROL PATTERN SELECTOR

Easily attain your preferred control pattern without stopping the work. A new control pattern selector switch is conveniently located under the seat within easy reach – so operators can switch between ISO and standard controls without getting up or stretching to reach out-of-the-way switches.

HEATED SEAT

When it is cold outside, the optional heated seat on select models makes a perfect complement to the automatic temperature control, keeping your body warm on frigid days.

REDUCED SOUND AND VIBRATION

The body panels aren't just for looks. They're stiffer and more robust. They fit tighter together, and they include stronger hinges and latches. Together, these features reduce vibration and lower sound levels in the cab.



ADVANCED DISPLAY OPTIONS

Enjoy the ultimate operator experience.

STANDARD DISPLAY

The easy-to-read cab display panel provides full-featured machine interaction and monitoring capabilities from right in the cab. Run your excavator more efficiently and solve more problems in the field with on-screen content. The display also supports multiple languages, as well as imperial and metric units.



OTHER STANDARD DISPLAY FEATURES

- Monitor and change attachment settings, such as the depth check system.
- Integrated rearview camera display automatically switches your display to the camera view when traveling in reverse (rearview camera required).
- Jog shuttle control enables easy navigation and input.
- Hide-away navigation bar helps you quickly move from screen to screen.
- Set one owner profile and up to four operator profiles.
- Password-protected keyless start eliminates downtime from lost keys.
- Activate or deactivate auto-throttle.
- Activate or deactivate auto idle.
- Track engine hours from any screen on the display.
- Timed screen lock allows a set period for code-free machine restarts.



The optional rear camera offers a continuous rear view from the operator's seat, if desired. It helps identify obstacles that, if not avoided, could damage the excavator and its components. The optional camera is mounted high and out of the way to prevent contact with obstacles and debris. A protective structure further ensures rear display reliability.

ADVANCED DISPLAY OPTIONS

OPTIONAL 7-INCH TOUCH DISPLAY

It's the most advanced in-cab display for compact equipment. With the optional touch display for R2-Series excavators, you'll receive detailed machine information and experience unprecedented device connectivity. The wide, easy-to-use touch screen delivers machine performance information for more efficient operation and improved productivity. The display also supports multiple languages.

GLOVE SENSITIVITY

The screen works with your light-duty work gloves, providing convenient touch operation without the inconvenience of glove removal.

SCREEN DURABILITY

The high-resolution, full-color touch display is designed to work with open cabs and extreme weather. The tempered glass screen is rated 9H on the Mohs hardness scale for a high level of scratch protection. The display is pressure-washer tested to ensure superior waterproofing that stands up to wet, humid environments.



PHONE AND DEVICE CONNECTIVITY

An integrated radio with Bluetooth allows for a wide range of on-the-job entertainment – plus the ability to make and receive hands-free phone calls.

ACTIVE NOISE CANCELING DURING PHONE CALLS

Active noise canceling on the high-fidelity in-cab microphone allows call recipients to hear operators easily and clearly.

DETAILED FAULT CODE INFORMATION

Save time troubleshooting with more detailed error code explanations. You'll also see which codes are currently active, what time inactive codes occurred and the name of the operator who was logged in when the fault code occurred. For select codes, you can access extended descriptions that give you information on the root cause of the issue and its impact.

JOG SHUTTLE

If your hands are wet or you are working with dirty gloves, the jog shuttle provides an easy backup input.

OTHER INNOVATIVE TOUCHSCREEN FEATURES

- Import contacts from your mobile phone.
- · Keep a customizable contacts list for each operator.
- Access detailed operator statistics and provide jobsite security with 20 unique operator codes.
- Enable feature lockouts and maximum travel speeds to customize the experience per operator.
- Track engine hours, idle hours and fuel usage by operator.
- Set a new clock for each job to track machine productivity and employee performance.

- Add favorite screens for easy access.
- Unique radio includes presets for each operator.
- USB power port keeps devices charged and supports MTP for playing music.
- Auxiliary input via 3.5 mm iack.
- An ambient light sensor has day and night modes.
- Timed screen lock allows a set period for code-free machine restarts.

UPTIME PROTECTION

UPTIME PROTECTION

No other manufacturer provides so many job-proven features to give you more uptime in the field. Standard features such as machine protection, battery rundown protection, on-board diagnostics and sealed connectors all help you stay on the job longer.

MACHINE PROTECTION

Bobcat excavators monitor engine and hydraulic functions. If conditions risk damage to the engine or hydraulic components. the system will alert the operator and, if necessary, de-rate engine power as well as hydraulic flow. It still allows the operator to complete the job at hand or move the excavator to an area for diagnosis.

DIAGNOSTICS

Bobcat provides on-board diagnostics to efficiently troubleshoot problems in the field or prevent them before they occur reducing downtime for you.

KEYLESS START

Reduce the risk of loss due to theft or unauthorized use by equipping your excavator with the optional keyless start. It comes standard on R2-Series excavators.




ROBUST WORK GROUP

The work group on Bobcat excavators is designed to provide longer structural life and improve lifting performance. Cast pivot joints provide precise pin alignment, which lengthens the service life of pivot pins and bushings. The boom structure is designed with room for secondary auxiliary hydraulics - so you can add the option faster and for less cost.



BETTER HOSES, BETTER ROUTING

Bobcat steel hydraulic lines offer better protection than rubber hoses. They're routed through the lower portion of the boom swing casting and tucked securely into the top area of the boom structure, preventing costly damage and protecting component life.

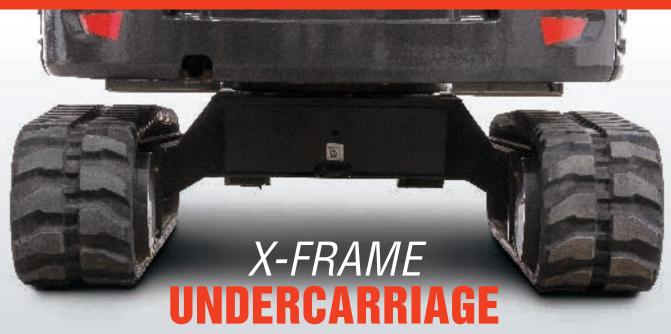

The X-frame design offers increased ground clearance that allows you to go through more. The design sheds debris to reduce your clean-up time as well.

AUTOMATIC GLOW PLUGS

Bobcat uses automatic glow plugs to warm the fuel mixture within the engine when it is started at a cooler temperature. This leads to easier starts and longer life for the engine and starter.

BATTERY RUNDOWN PROTECTION

The lighting circuit automatically shuts down to prevent accidental battery discharge when lights are left on after the work is done.

PROTECTED DRIVE MOTORS

With drive motors contained within the width of the tracks, they're protected from damage. You also have more agility in soft conditions. Motor covers are also recessed, eliminating more potential for damage.


ELECTRONIC PROTECTION

Bobcat controls and electrical systems are engineered with more watertight, corrosion-resistant connectors than other manufacturers' machines.

FUEL FILL ALERT

An audible alarm beeps faster as the fuel tank approaches its capacity, taking the guesswork out of refueling. Available on the majority of Bobcat excavators.



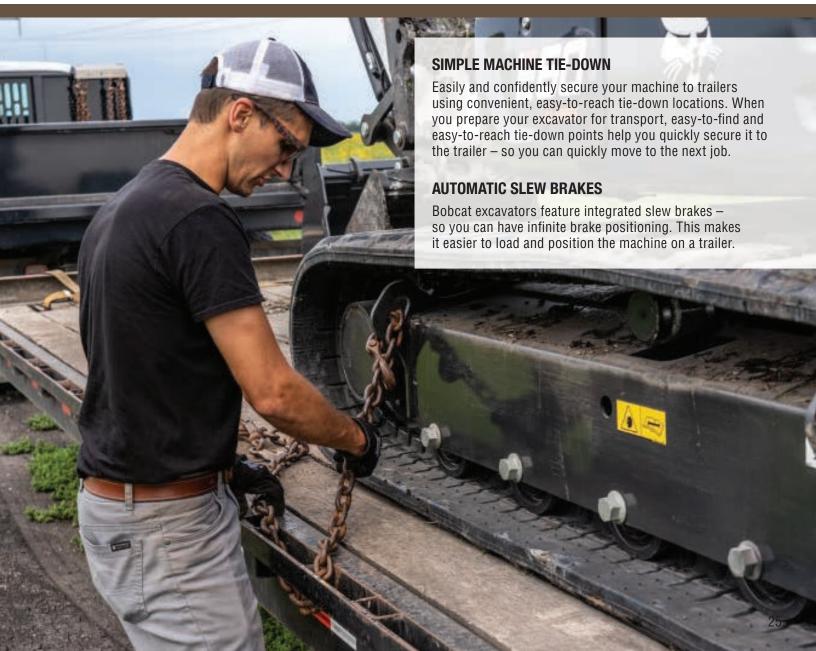



Tier 4 emissions standards required every equipment manufacturer to make equipment changes in order to meet new emission requirements. Bobcat seized the opportunity to design a non-DPF Tier 4 solution that avoids the maintenance costs and downtime that come with DPF exhaust aftertreatment.

Bobcat engines utilize their own ultra-low particulate combustion (ULPC) design to drastically reduce particulate matter without the need for a DPF. The biggest advantage of a non-DPF Tier 4 solution is simplicity.

NO REGENERATION

The DPF cleaning process, called regeneration, requires knowledgeable operation to keep the DPF and engine running properly. Since Bobcat compact excavators do not require a DPF, regeneration will never slow down your work.

COLD WEATHER ENGINE PROTECTION

Protects your machine from possible damage and working too hard before the engine is properly warmed up.







R2-SERIES

REDESIGNED BOBCAT ENGINE

Operators will notice a more efficient engine that delivers the performance you need while reducing and simplifying routine maintenance. It also improves cold-weather operation and includes a variety of features that make maintenance and service more convenient.

NEW FUEL FILTER

The new fuel filter has more holding capacity to capture impurities for longer intervals, greatly extending its life. The filter is also easier to change, and it includes a clear water bowl for easy monitoring and a sensor to notify you when draining is needed. To simplify upkeep, the display lets you know when the filter needs to be serviced.



NEW LIFT PUMP AND SELF-PRIMING FUEL SYSTEM

The new fuel pump enables a self-priming system that continuously forces air out of the low-pressure fuel system and back into the fuel tank, eliminating the need for a primer bulb. This makes it easier on operators if the fuel tank runs empty or if changing the fuel filter.

FUEL PRE-FILTER

A new fuel pre-filter protects the lift pump from particles that can increase wear and degrade performance. You don't need a screen at the fuel neck to capture debris.

IMPROVED FUEL RECIRCULATION VALVE

You work when it's cold, and your excavator should, too. A new and improved fuel recirculation valve returns warm fuel to the lift pump to reduce fuel gelling issues. It works better than an electric heater, keeping you running in frigid conditions and greatly improving cold-weather performance.

PANORAMIC SERVICEABILITY

Time is money. Routine maintenance is an important factor in controlling operating costs. Filters, fluid and daily maintenance checkpoints are right at your fingertips.







Bobcat makes it easy to find and reach your engine checkpoints in a Bobcat excavator so daily maintenance actually gets done every day. Comparing our service access to other excavators is like comparing a 60-inch LED to a 15-inch black-and-white TV. The swing-open tailgate and side access hood put the engine and pump package, valve bank, cooling system, and plumbing in easy reach.

A centralized grease bank makes fast, simple work of lubricating the slew bearing, slew pinion and swing cylinder. Track tensioning is performed via an easy-to-reach, well-protected grease cylinder fitting.

On most Bobcat excavators, a multigroove auto-tensioning belt, made of tough DuPont™ Kevlar®, requires no adjustment, making maintenance much easier. The cooling cores can be separated for quick, easy cleaning of the radiator.

MORE THAN G

Bobcat excavators have your business expansion built right in. Nobody builds more compact excavator attachments. Whether it's breaking concrete, breaking down buildings or drilling tree holes, Bobcat attachments help you take on new jobs and get more use from your machine. You can even share some of the same attachments that fit on your Bobcat loaders. With more than a dozen attachments to choose from, your Bobcat excavator is not just a digging machine; it's a versatile tool carrier.

BUILT-IN VERSATILITY

- Auger
- Breaker
- Clamp
- Flail cutter
- · Grading blade
- Grading bucket
- Grapple, three-tine
- Hydra-Tilt[™] swing accessory
- Packer wheel
- Plate compactor
- PowerTilt swing accessory
- Pro Clamp[™] system
- Ripper
- Trencher



STEEL TRACKS WITH RUBBER PADS

Steel tracks increase your uptime and pushing force when you're working in harsh or abrasive jobsites. Available on select machines.

With many excavators, the quick-tach system, hoses and couplers, controls, and clamp mounts can be pricey add-ons. The Bobcat-exclusive X-Change™ attachment mounting system, plus quick couplers, clamp mounts, port release and fingertip controls, come standard on a majority of our excavators. You will have multi-attachment functionality right away – so you can take on more jobs.



SELECTABLE AUXILIARY HYDRAULIC FLOW

Bobcat excavators allow you to quickly select an auxiliary flow rate that best matches a particular attachment. Low flow provides precise control of the PowerTilt® swing accessory and Hydra-Tilt swing accessory. Medium flow is perfect for the clamp attachment. Maximum flow is best for breakers, augers and compactors.

FINGERTIP CONTROLS

The auxiliary hydraulic controls are at your fingertips, providing precision control and low-fatigue operation. Variable flow allows you to control the attachment speed and precisely move a clamp. Detent provides continuous flow for attachments such as augers and plate compactors.

PowerTilt® is a registered trademark of Helac Corporation.

SPECIFICATIONS









Excavator	E10	E20	E 26	E32
Series	R	R	R	R
Tail Swing Type	Zero	Zero	Minimal - 3.5 in. (89 mm)	Conv 13.8 in. (351 mm)
Weight	2593 lb. (1176 kg)	4306 lb. (1953 kg)	6489 lb. (2943 kg)	7340 lb. (3329 kg)
Dig Depth	6 ft. (1820 mm)	8 ft. 5 in. (2565 mm)	9 ft. 5 in. (2870 mm)	10 ft. 2 in. (3099 mm)
Reach at Ground Level	10 ft. 2 in. (3093 mm)	14 ft. (4264 mm)	16 ft. (4876 mm)	16 ft. 3 in. (4953 mm)
Dump Height Clearance	6 ft. (1818 mm)	8 ft. 8 in. (2667 mm)	10 ft. 4 in. (3150 mm)	11 ft. (3340 mm)
Track Width	27.9-43.3 in. (709-1099 mm)	39.0-53.5 in. (991-1359 mm)	61.0 in. (1549 mm)	61.0 in. (1549 mm)
Ground Pressure	4.2 psi (0.29 bar)	4.4 psi (0.30 bar)	4.1 psi (0.28 bar)	4.7 psi (0.32 bar)
Standard Track Width	7.1 in. (180 mm)	9.1 in. (230 mm)	11.8 in. (300 mm)	11.8 in. (300 mm)
Performance				
Arm Breakout Force	1248 lbf. (5551 N)	2086 lbf. (9279 N)	3547 lbf. (15,778 N)	4859 lbf. (21,614 N)
Bucket Breakout Force	1865 lbf. (8296 N)	4684 lbf. (20,835 N)	5652 lbf. (25,141 N)	6969 lbf. (31,000 N)
Rated Lift Capacity				
(Over blade, ground level, 10 ft. (3 m) reach)	527 lb. (239 kg)	1098 lb. (498 kg)	2359 lb. (1070 kg)	2795 lb. (1268 kg)
(Over side, ground level, 10 ft. (3 m) reach)	263 lb. (119 kg)	638 lb. (289 kg)	1016 lb. (461 kg)	1376 lb. (624 kg)
Travel Speed: Low/High	1.3/1.7 mph (2.1/2.7 km/hr.)	1.3/2.6 mph (2.1/4.2 km/hr.)	1.8/3.2 mph (2.9/5.1 km/hr.)	1.6/2.9 mph (2.6/4.7 km/hr.)
Long Arm Option Performance				
Tail Swing Type/Overhang	_	_	Minimal – 3.5 in. (89 mm)	Conv 17.3 in. (439 mm)
Weight	_	_	6489 lb. (2943 kg)	8203 lb. (3721 kg)
Dig Depth	_	_	9 ft. 6 in. (2906 mm)	11 ft. 2 in. (3404 mm)
Reach at Ground Level	_	_	16 ft. (4874 mm)	17 ft. 3 in. (5257 mm)
Dump Height Clearance			10 ft. 4 in. (3150 mm)	11 ft. 5 in. (3480 mm)
Extendable Arm Option Performance				
Tail Swing Type/Overhang	_	_	_	Conv 17.3 in. (439 mm)
Weight	_	_	_	8434 lb. (3826 kg)
Dig Depth	_	_	_	12 ft. 9 in. (3886 mm)
Reach at Ground Level	_	_	_	18 ft. 9 in. (5715 mm)
Dump Height Clearance	_	_	_	12 ft. 5 in. (3785 mm)
Engine	Tier 4	Tier 4	Tier 4	Tier 4
Horsepower	10.2 hp (7.6 kW)	13.9 hp (10.4 kW)	24.8 hp (18.5 kW)	24.8 hp (18.5 kW)
Engine Type	Diesel	Diesel	Diesel	Diesel
Fuel Tank Capacity	4.2 gal. (15.9 L)	5.0 gal. (18.9 L)	9.1 gal. (34.4 L)	13.7 gal. (51.9 L)
Battery Rundown Protection	<u> </u>	Std	Std	Std
Machine Features & Options				
Angle Blade	_	_	_	_
Auto-Idle Throttle	_	_	Std	Std
Auto-Shift Travel System	_	Opt	Std	Std
Automatic Slew Brake	_	Std	Std	Std
Blade Float	_	_	Std	Std
Bolt-On Street Pad	_	_	—	—
Cab with Heat and A/C	_	_	Opt	Opt
Control Pattern Selector Valve	Std	Std	Std	Std
Deluxe Cloth Seat	_	_	Opt	Opt
Depth Check	_	_	_	Opt
Diverter Valve	_	_	_	Opt
Fingertip Boom Swing Control	_	Opt	Std	Std
Falling Object Protection Structure (FOPS)	_	_	Std	Std
Roll Over Protective Structure (ROPS)	_	Std	Std	Std
Fold-Down TOPS	Std	_	_	_
Fuel Fill Alert	_	Std	Std	Std
Heated Seat	_	_	_	Opt
In-Track Swing Frame	Std	Std	Std	Std
Keyless/Password Start System	Opt	Opt	Opt	Opt
Lift Eye	Opt	Opt	Opt	Opt
Retractable Seat Belt	Std	Std	Std	Std
Retractable Undercarriage	Std	Std	_	_
Segmented Tracks		_	_	_
Segmenteu macks	_	-		
Steel Tracks		<u> </u>	_	_
Steel Tracks				_
Steel Tracks Features for Attachments			_	
Steel Tracks Features for Attachments Mechanical Attachment Quick-Tach System				Std
Steel Tracks Features for Attachments Mechanical Attachment Quick-Tach System Hydraulic Attachment Quick-Tach System			_	
Steel Tracks Features for Attachments Mechanical Attachment Quick-Tach System Hydraulic Attachment Quick-Tach System Pin-On Attachment Mounting System			_	Std
Steel Tracks Features for Attachments Mechanical Attachment Quick-Tach System Hydraulic Attachment Quick-Tach System Pin-On Attachment Mounting System Hydraulic Pin Grabber Attachment Mounting System	 - - -			Std Opt —
Steel Tracks Features for Attachments Mechanical Attachment Quick-Tach System Hydraulic Attachment Quick-Tach System Pin-On Attachment Mounting System Hydraulic Pin Grabber Attachment Mounting System Auxiliary Hydraulics with Quick Couplers			Std — — — — — — — — — — — — — — — — — — —	Std Opt —
Steel Tracks Features for Attachments Mechanical Attachment Quick-Tach System Hydraulic Attachment Quick-Tach System Pin-On Attachment Mounting System Hydraulic Pin Grabber Attachment Mounting System			Std — — — — — — — — — Std	Std Opt — — Std
Steel Tracks Features for Attachments Mechanical Attachment Quick-Tach System Hydraulic Attachment Quick-Tach System Pin-On Attachment Mounting System Hydraulic Pin Grabber Attachment Mounting System Auxiliary Hydraulics with Quick Couplers Auxiliary Hydraulic Flow		——————————————————————————————————————	Std — — — — — — — — — — — — — — — — Std — — Std — 14.2 gpm (53.8 L/min.)	Std Opt — — — Std 16.9 gpm (64.0 L/min.)
Steel Tracks Features for Attachments Mechanical Attachment Quick-Tach System Hydraulic Attachment Quick-Tach System Pin-On Attachment Mounting System Hydraulic Pin Grabber Attachment Mounting System Auxiliary Hydraulics with Quick Couplers Auxiliary Hydraulic Flow Auxiliary Hydraulic Pressure			Std — — — — — — — — — — — — — — — — — — —	Std Opt — — Std 16.9 gpm (64.0 L/min.) 2987 psi (206.95 bar)
Steel Tracks Features for Attachments Mechanical Attachment Quick-Tach System Hydraulic Attachment Quick-Tach System Pin-On Attachment Mounting System Hydraulic Pin Grabber Attachment Mounting System Auxiliary Hydraulics with Quick Couplers Auxiliary Hydraulic Flow Auxiliary Hydraulic Pressure Hydraulic Clamp		——————————————————————————————————————	Std ————————————————————————————————————	Std Opt — — Std 16.9 gpm (64.0 L/min.) 2987 psi (206.95 bar) Opt











ESS 25 NP /331P	
R	
1.00 1.00	
1.00 1.00	0 mm)
101.12 in (.0909 mm)	
17 12 11 12 13 13 13 14 13 13 13 14 13 13	-,
11 tt. (349 mm)	,
\$6,6 in, (1769 mm)	-
4.6 psi (0.32 barr) 4.7 psi (0.32 barr) 4.7 psi (0.29 barr) 5.7 psi (0.39 barr) 11.8 in (.300 mm) 13.8 in (.350 mm) 15.7 in (.400 mm	
11.8 in. (300 mm)	,
### ### ### ### ### ### ### ### ### ##	
6968 lbt. (30,995 N) 9601 lbt. (42,707 N) 9511 lbt. (42,307 N) 10,261 lbt. (45,643 N) 15,130 lbt. (67,3	1111)
6968 bt. (30,995 N) 9601 bt. (42,707 N) 9511 bt. (42,307 N) 10,261 bt. (45,643 N) 15,130 lbf. (67,3 c)	40.10
3232 lb. (1466 kg)	,
1407 lb. (638 kg) 1/1482 lb. (672 kg)	J1 N)
1497 lb. (638 kg) / 1482 lb. (672 kg)	
1.6/2.9 mph (2.6/4.7 km/hr.)	ɔ̃ kg)
Minimal = 3.5 in. (89 mm)	kg)
8377 b. (3800 kg) 8857 b. (3895 kg) 10,425 b. (4729 kg) 11,894 b. (5395 kg) 12,315 b. (5596 kg) 19,600 b. (889 111, 2 in. (3404 mm) 111 ft. 4 in. (3454 mm) 12 ft. 5 in. (3835 mm) 13 ft. 1 in. (3931 mm) 15 ft. 2 in. (4625 mm) 20 ft. 6 in. (6276 mm) 20 ft. 7 in. (5908 mm) 20 ft. 6 in. (6276 mm) 20 ft. 7 in. (5908 mm) 20 ft. 6 in. (6276 mm) 20 ft. 7 in. (5908 mm) 20 ft. 6 in. (6276 mm) 20 ft. 7 in. (5908 mm) 20 ft. 6 in. (6276 mm) 20 ft. 7 in. (5908 mm) 20 ft. 20	4 km/hr.)
8377 b. (3800 kg) 8857 b. (3895 kg) 10,425 b. (4729 kg) 11,894 b. (5395 kg) 12,315 b. (5596 kg) 19,600 b. (889 111, 2 in. (3404 mm) 111 ft. 4 in. (3454 mm) 12 ft. 5 in. (3835 mm) 13 ft. 1 in. (3931 mm) 15 ft. 2 in. (4625 mm) 20 ft. 6 in. (6276 mm) 20 ft. 7 in. (5908 mm) 20 ft. 6 in. (6276 mm) 20 ft. 7 in. (5908 mm) 20 ft. 6 in. (6276 mm) 20 ft. 7 in. (5908 mm) 20 ft. 6 in. (6276 mm) 20 ft. 7 in. (5908 mm) 20 ft. 6 in. (6276 mm) 20 ft. 7 in. (5908 mm) 20 ft. 20	
8377 b. (3800 kg) 8857 b. (3895 kg) 10,425 b. (4729 kg) 11,894 b. (5395 kg) 12,315 b. (5596 kg) 19,600 b. (889 111, 2 in. (3404 mm) 111 ft. 4 in. (3454 mm) 12 ft. 5 in. (3835 mm) 13 ft. 1 in. (3931 mm) 15 ft. 2 in. (4625 mm) 20 ft. 6 in. (6276 mm) 20 ft. 7 in. (5908 mm) 20 ft. 6 in. (6276 mm) 20 ft. 7 in. (5908 mm) 20 ft. 6 in. (6276 mm) 20 ft. 7 in. (5908 mm) 20 ft. 6 in. (6276 mm) 20 ft. 7 in. (5908 mm) 20 ft. 6 in. (6276 mm) 20 ft. 7 in. (5908 mm) 20 ft. 20	0 mm)
11 ft 2 in (3404 mm) 11 ft .4 in (3454 mm) 12 ft .5 in (3835 mm) 13 ft .1 in (3981 mm) 15 ft .2 in (4622 ft .6 in (6278 mm) 20 ft .6 in (6278 mm) 12 ft .5 in (7176 mm) 16 ft .5 in .5000 Minimal – 3,5 in (89 mm) Conv. – 12.8 in .(325 mm) — Conv. – 11.2 in .(282 mm) — 8597 lb. (3899 kg) / 8807 lb. (3995 kg) 10,666 lb. (4838 kg) — 12,646 lb. (5736 kg) — 12 ft .9 in .(3886 mm) 12 ft .4 in .(3769 mm) — 14 ft .8 in .(4470 mm) — 12 ft .9 in .(3886 mm) 19 ft .1 in .(5816 mm) — 22 ft .1 in .(6743 mm) — 12 ft .9 in .(3886 mm) 19 ft .1 in .(5816 mm) — 22 ft .1 in .(6743 mm) — 12 ft .9 in .(3886 mm) 19 ft .1 in .(5816 mm) — 22 ft .1 in .(6743 mm) — 12 ft .9 in .(3886 mm) 19 ft .1 in .(3768 mm) — 15 ft .2 in .(4622 mm) — 12 ft .9 in .(378 kg) — 1	
18 ft. 1 in. (5520 mm) 18 ft. 2 in. (5537 mm) 20 ft. 6 in. (6278 mm) 20 ft. 6 in. (6256 mm) 23 ft. 6 in. (7176 mm) 11 ft. 6 in. (3505 mm) 12 ft. 9 in. (3886 mm) 13 ft. 9 in. (4191 mm) 14 ft. 3 in. (4347 mm) 16 ft. 5 in. (5003 mm) Minimal – 3.5 in. (89 mm) Conv. – 12.8 in. (325 mm) — Conv. – 11.2 in. (282 mm) — 8597 lb. (3899 kg) / 8807 lb. (3995 kg) 10,666 lb. (4838 kg) — 12,646 lb. (5736 kg) — 19 ft. 7 in. (5989 mm) 12 ft. 4 in. (3769 mm) — 14 ft. 8 in. (4470 mm) — 19 ft. 7 in. (5989 mm) 19 ft. 1 in. (5316 mm) — 22 ft. 1 in. (6743 mm) — 19 ft. 7 in. (5989 mm) 19 ft. 1 in. (5316 mm) — 22 ft. 1 in. (6743 mm) — Tier 4	
11 ft. 6 in. (3505 mm)	
Minimal - 3.5 in. (89 mm)	,
8597 lb. (3899 kg) / 8807 lb. (3995 kg) 10.666 lb. (4838 kg) — 12.646 lb. (5736 kg) — 12 ft. 9 in. (3886 mm) 12 ft. 4 in. (3769 mm) — 14 ft. 8 in. (4470 mm) — 19 ft. 7 in. (5969 mm) 19 ft. 1 in. (6166 mm) — 22 ft. 1 in. (6743 mm) — 12 ft. 5 in. (3785 mm) 13 ft. 7 in. (4140 mm) — 15 ft. 2 in. (4622 mm) — Tier 4 10 kg 2 mm) — 65.4 hp (48.7) 65.4 hp (48.7) 65.4 hp (48.7) 65.4 hp (48.7) 66.4 hp (48.7) <t< td=""><td>11111)</td></t<>	11111)
8597 lb. (3899 kg) / 8807 lb. (3995 kg) 10.666 lb. (4838 kg) — 12.646 lb. (5736 kg) — 12 ft. 9 in. (3886 mm) 12 ft. 4 in. (3769 mm) — 14 ft. 8 in. (4470 mm) — 19 ft. 7 in. (5969 mm) 19 ft. 1 in. (6166 mm) — 22 ft. 1 in. (6743 mm) — 12 ft. 5 in. (3785 mm) 13 ft. 7 in. (4140 mm) — 15 ft. 2 in. (4622 mm) — Tier 4 10 kg 2 mm) — 65.4 hp (48.7) 65.4 hp (48.7) 65.4 hp (48.7) 65.4 hp (48.7) 66.4 hp (48.7) <t< td=""><td></td></t<>	
12 ft. 9 in. (3886 mm)	
19ft.7 in. (5969 mm)	
12 tt. 5 in. (3785 mm) 13 tt. 7 in. (4140 mm) — 15 tt. 2 in. (4622 mm) —	
Tier 4	
24.8 hp (18.5 kW)/33.5 hp (25.0 kW) 42.6 hp (31.7 kW) 49.7 hp (37.0 kW) 55.7 hp (41.5 kW) 65.4 hp (48.7 kW) Diesel/Turbo Diesel Turbo Diesel Da Da Da Da Da Da Da Da Dot	
Diesel/Turbo Diesel	
Diesel/Turbo Diesel	(W)
13.7 gal. (51.9 L) 19.0 gal. (71.9 L) 19.0 gal. (71.9 L) 30.6 gal. (115. Std Std Std Std Std Std Opt Opt Opt Opt Opt Std Std Std Std Std Std </td <td></td>	
Std Std Std Std Std Opt Opt Opt Opt Opt Std	
Opt Opt Opt Opt Std Std Std Std Std Std	J L)
Std Std Std Std Std Std Std Std Std Std Std Std Std Std Std Std Std	
Std Std <td></td>	
Std Std Std Std Std Std Std Std Std Std Std Std Std Std Std Opt Opt Opt Opt Opt Std Std Std Std Std Std Std Opt Std	
Std Std <td></td>	
Std Std Std Std Std Opt Opt Opt Opt — Opt Opt Opt Opt Std Std Std Std Std Std Opt Opt Opt Opt Opt Opt Opt <t< td=""><td></td></t<>	
Opt Opt Opt Opt Std Std Std Std Std Std Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Std	
Opt Opt Opt Opt Std Std Std Std Std Std Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Std	
Opt Opt Opt Opt Std Std Std Std Std Std Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Std	
Std Std Std Std Std Opt Opt Opt Opt Std Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Std Std Std Std Std	
Opt Opt Opt Opt Std Opt Opt Opt Opt Opt Opt Opt Opt Opt Opt Std Std Std Std Std	
Opt Opt <td></td>	
Opt Opt Opt Opt Opt Std Std Std Std Std Std Std Std Std Std Std Std Std Std Std Std Std	
Std Std <td></td>	
Std Std <td></td>	
Std Std <td></td>	
Cty Cty Cty Cty Cty Cty	
Opt Opt Opt Opt Opt	
Std Std Std Std Std Std	
Opt Std Std Std Std Std	
Opt Std Std Std Std Std	
Std Std Std Std Std Std	
Opt	
Opt Opt Opt Opt Opt	
Std Std Std Std —	
Opt Opt Opt Opt —	
Opt	
Std Std Std Std Std Std	
16.9 gpm (64.0 L/min.) 20.0 gpm (75.7 L/min.) 20.0 gpm (75.7 L/min.) 20.0 gpm (75.7 L/min.) 25.1 gpm (95.0 L	/min.)
2987 psi (205.95 bar) 3045 psi (209.95 bar) 3045 psi (209.95 bar) 3045 psi (209.95 bar) 3045 psi (209.95 bar)	5 bar)
Opt Opt Opt Opt Opt	
Std Std Std Std Std Std	
Opt Opt Opt Opt	
Std Std Std Std Std Std	





















Bob-Tach® Mounting System

Excavators

Loaders

Loaders

Toolcat™ Utility Work Machines

First Utility Vehicle with RapidLink



Bobcat warranty.

GET PEACE OF MIND.

For a small investment, you can protect your Bobcat machine with additional warranty coverage to minimize your repair costs.

MANAGE RISK.

By providing a comfortable shield of protection against repairs due to defects in materials or workmanship, an extended warranty greatly decreases your exposure to financial risk.

transferred to the new owner. The extended warranty also tells a prospective buyer that your machine received superior care and maintenance.

ENJOY BOBCAT-APPROVED PARTS AND SERVICE.

The Protection Plus extended warranty includes factorybacked parts and labor coverage, and it's honored at any authorized Bobcat dealer.



















2009

Loader 2014

Loaders 2016

Excavators 2017

2019

2019

Excavators 2020 2020

Small Articulated Loaders 2020

2020



Everything we put into Bobcat equipment is designed to make more of whatever you bring to the job. Whether it's strength, versatility, speed or agility, it's built around you.



Bobcat is a Doosan company. Doosan is a global leader in construction equipment, power and water solutions, engines, and engineering, proudly serving customers and communities for more than a century.

Bobcat®, the Bobcat logo and the colors of the Bobcat machine are registered trademarks of Bobcat Company in the United States and various other countries. ©2021 Bobcat Company. All rights reserved.





